

OPTFIXSL-150SC10075-50W



Plafoniera LED Linear Light / LED Linear Light
Oświetlenie liniowe / LED Linear Leuchten



Da incasso / recessed / podtynkowe / unterputzbeleuchtung

A sospensione / suspended / wiszące / hängende


A muro / mounted / przykręcane / angeschraubte

IT / ENG / PL / DE


Consumo / Power consumption / Zużycie energii / Energieverbrauch	50W
Voltaggio / Input voltage & frequency	100-240VAC, 50/60Hz
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Fattore di potenza / Power factor / Współczynnik mocy / Leistungsfaktor	> 0,95
Tipo LED / LED type / Typ LED / Typ von LED	LED SMP
Lumen / Total Lumens	5000Lm
Całkowita ilość lumenów / Gesamte Menge von Lumen	
Angolo di proiezione / Beam angle	110°
Kąt rozsyłu światła / Lichtverteilungswinkel	
Colore / Product color / Kolor produktu / Farbe des Fabrikats	Bianco / white / biały / weiß Nero / black / czarny / schwarz Grigio / grey / szary / grau
Temperatura della luce / Color temperature	2700-300K / 3900-4500K / 5000-6500K
Temperatura barwowa / Farbtemperatur	
CRI / Color Rendering Index	> 90
Współczynnik oddawania barw / Farbwiedergabeindex	
Durata / Lifetime / Czas użytkowania / Lebensdauer	50.000h
Riciclabile / Recycling / Recycling / Recykling	Sì / yes / tak / ja
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	IP40
Temperatura di funzionamento / Operating temperature	-20°C~+45°C
Temperatura pracy / Arbeitstemperatur	
Materiali e finiture / Materials and finishing	Aluminum + PC / Alluminio + PC / Aluminium + PC / Aluminum + PC
Materiały i wykończenie / Materialien und Ausfertigung	
Dimensioni / Product dimensions	1507x100x75mm
Wymiary produktu / Abmessungen des Fabrikats	
Energy label / Energy label	A*
Etykieta energetyczna / Energieverbrauchskennzeichnung	
Accessori / Accessories / Akcesoria / Zubehör	Kit di montaggio / installation kit / zestaw montażowy / Bausatz
Opzioni / Options / Opcje / Varianten	Oscuramento / Dimming / Przyciemnianie / Verdunklung
Peso netto / Net weight / Waga netto / Nettogewicht	~5kg

*Corporate research

Illumination data:




Available colors:

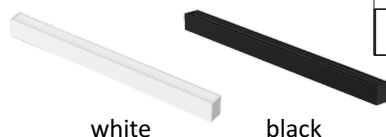

white

black


Dimensions [mm]:



Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN61000-3-2:2006+A1/A2:2009
EN60598-2-5:1998	EN61000-3-3:2008
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015:2006+A1:2007+A2:2009
EN61547:2009	EMC 2004/108/EC

Installation and accessories:

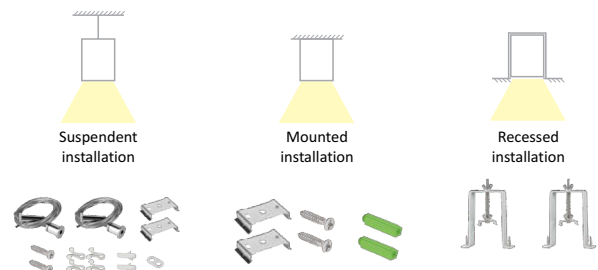


OPTFIXSL-150SC10075-50W

Electrical connection for continuous run:

When input voltage is 110V(AC), the max continuous connection is 250W

When input voltage is 230V(AC), the max continuous connection is 550W

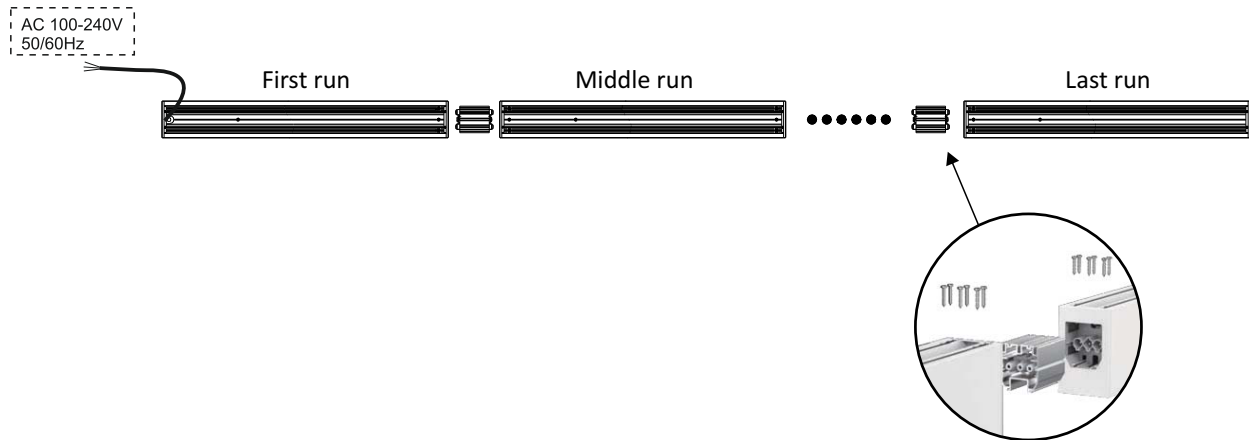

Appliance:

Hotel / office / shop / gallery / restaurant / gym / school

