

OPTFL06LT-150RGB




Faretto LED / LED Flood light
Reflektory LED / LED - Scheinwerfer



IT / ENG / PL / DE	
Consumo LED / LED power / Zużycie energii LED / LED-Leistung	150W
Consumo / Power consumption / Zużycie energii / Energieverbrauch	170W
Voltaggio / Input voltage & frequency	48 V DC
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	> 95
Fattore di potenza / Power factor / Współczynnik mocy / Leistungsfaktor	Philips Lumileds / Cree
Tipo LED / LED type / Typ LED / Typ von LED	3000-7000K
Temperatura della luce / Color temperature	RGB, rosso, verde, blu, ambra / RGB, red, green, blue, amber / RGB, czerwony, zielony, niebieski, bursztynowy / RGB, rot, grün, blau, bernstein
Temperatura barwowa / Farbtemperatur	15x15 / 30x30 / 40x40 / 60x60 / 60x135 / 85x135
Angolo di proiezione / Beam angle	30.000 h
Kąt rozsyłu światła / Lichtverteilungswinkel	IP65
Durata / Lifetime / Czas użytkowania / Lebensdauer	-25°C~+45°C
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	A*
Temperatura di funzionamento / Operating temperature	507x366x244 mm
Temperatura pracy / Arbeitstemperatur	16500 Lm
Energy label / Energy label	70
Etykieta energetyczna / Energieverbrauchskennzeichnung	Oscuramento / dimming / przyciemnianie / verdunklung
Dimensioni / Product dimensions	IP66+
Wymiary produktu / Abmessungen des Fabrikats	Meanwell HLG-185
Lumen / Total Lumens	~10,0 kg
Całkowita ilość lumenów / Gesamte Menge von Lumen	
CRI / Color Rendering Index	
Współczynnik oddawania barw / Farbwiedergabeindex	
Opzioni / Options / Opcje / Varianten	
Alimentatore / power supply / zasilacz / netzgerät	
Peso netto / Net weight / Waga netto / Nettogewicht	

*Corporate research

Dimensions [mm]:

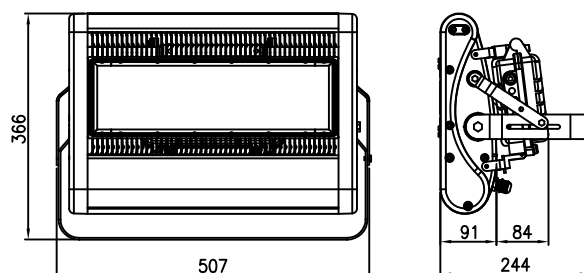

Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN61000-3-2:2006+A1/A2:2009
EN60598-2-5:1998	EN61000-3-3:2008
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015:2006+A1:2007+A2:2009
EN61547:2009	EMC 2004/108/EC