

OPTFL06LT-200



Faretto LED / LED Flood light
Reflektory LED / LED - Scheinwerfer




IT / ENG / PL / DE	
Consumo LED / LED power / Zużycie energii LED / LED-Leistung	200W
Consumo / Power consumption / Zużycie energii / Energieverbrauch	220W
Voltaggio / Input voltage & frequency	90-305VAC, 50/60Hz
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Fattore di potenza / Power factor / Współczynnik mocy / Leistungsfaktor	> 95
Tipo LED / LED type / Typ LED / Typ von LED	Philips Lumileds / CREE / Osram
Temperatura della luce / Color temperature	3000-7000K
Temperatura barwowa / Farbtemperatur	
Angolo di proiezione / Beam angle	5x15° / 30x30° / 40x40° / 60x60° / 60x135° / 85x40° /
Kąt rozsyłu światła / Lichtverteilungswinkel	85x90° / 85x100° / 85x135°
Durata / Lifetime / Czas użytkowania / Lebensdauer	60.000h
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	IP65
Temperatura di funzionamento / Operating temperature	-40°C~+45°C
Temperatura pracy / Arbeitstemperatur	
Energy label / Energy label	A*
Etykieta energetyczna / Energieverbrauchskennzeichnung	
Dimensioni / Product dimensions	507x366x244mm
Wymiary produktu / Abmessungen des Fabrikats	
Lumen / Total Lumens	25800lm
Całkowita ilość lumenów / Gesamte Menge von Lumen	
CRI / Color Rendering Index	> 85
Współczynnik oddawania barw / Farbwiedergabeindex	
Opzioni / Options / Opcje / Varianten	Oscuramento / dimming / przyciemnianie / verdunklung
Alimentatore / power supply / zasilacz / netzgerät	IP66+
Peso netto / Net weight / Waga netto / Nettogewicht	Meanwell HLG-240 ~8kg

*Corporate research


Illumination data:

M	LUX	W/L(M)
4	1287	3.6/ 9.6
6	321	7.3/ 19.3
8	143	10.9/ 28.9
10	80	14.6/ 38.6

BEAM ANGLE=85x135 DEG



Dimensions [mm]:

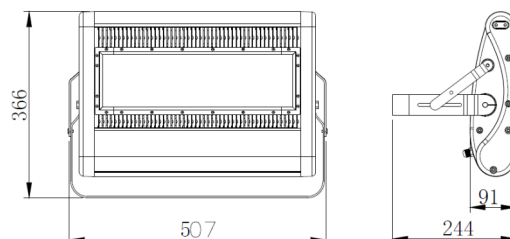

Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN61000-3-2:2006+A1/A2:2009
EN60598-2-5:1998	EN61000-3-3:2008
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015:2006+A1:2007+A2:2009
EN61547:2009	EMC 2004/108/EC

