

OPTFL06LT-500




Faretto LED / LED Flood light
Reflektory LED / LED - Scheinwerfer




IT / ENG / PL / DE	
Consumo LED / LED power / Zużycie energii LED / LED-Leistung	500W
Consumo / Power consumption / Zużycie energii / Energieverbrauch	550W
Voltaggio / Input voltage & frequency	90-305VAC, 50/60Hz
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Fattore di potenza / Power factor / Współczynnik mocy / Leistungsfaktor	> 95
Tipo LED / LED type / Typ LED / Typ von LED	Philips Lumileds / CREE / Osram
Temperatura della luce / Color temperature	3000-7000K
Temperatura barwowa / Farbtemperatur	
Angolo di proiezione / Beam angle	5x15° / 30x30° / 40x40° / 60x60° / 60x135° / 85x40° / 85x90° / 85x100° / 85x135°
Kąt rozsyłu światła / Lichtverteilungswinkel	
Durata / Lifetime / Czas użytkowania / Lebensdauer	60.000h
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	IP65
Temperatura di funzionamento / Operating temperature	
Temperatura pracy / Arbeitstemperatur	-40°C~+45°C
Energy label / Energy label	
Etykieta energetyczna / Energieverbrauchskennzeichnung	A*
Dimensioni / Product dimensions	811x606x369mm
Wymiary produktu / Abmessungen des Fabrikats	
Lumen / Total Lumens	65000Lm
Całkowita ilość lumenów / Gesamte Menge von Lumen	
CRI / Color Rendering Index	> 85
Współczynnik oddawania barw / Farbwiedergabeindex	
Opzioni / Options / Opcje / Varianten	Oscuramento / dimming / przyciemnianie / verdunklung IP66+
Alimentatore / power supply / zasilacz / netzgerät	Meanwell / Philips
Peso netto / Net weight / Waga netto / Nettogewicht	~27kg

*Corporate research

Illumination data:

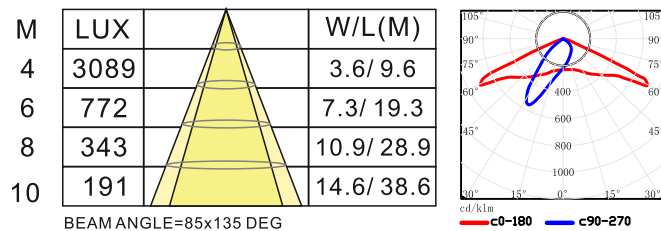

Dimensions [mm]:

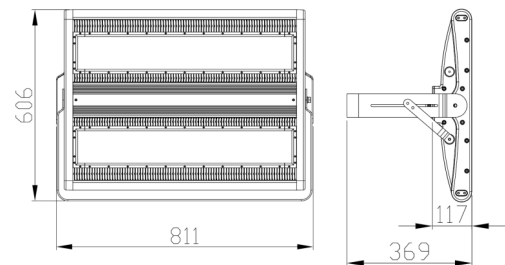

Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN6100-3-2/A2
EN60598-2-5:1998	EN6100-3-3
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015/A2