

OPTING02RD6060-5KP

Lampade interrato LED / Out door LED inground
Zewnętrzne dogruntowe LED / Bodenmontierte LED - Außenbeleuchtung




IT / ENG / PL / DE


Consumo LED / LED power / Zużycie energii LED / LED-Leistung	5W
Consumo / Power consumption / Zużycie energii / Energieverbrauch	6.2W
Voltaggio / Input voltage & frequency	100-240VAC, 50/60Hz
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Tipo LED / LED type / Typ LED / Typ von LED	Nichia COB
Temperatura della luce / Color temperature	2000-6000K
Temperatura barwowa / Farbtemperatur	
Durata / Lifetime / Czas użytkowania / Lebensdauer	50.000h
Riciclabile / Recycling / Recycling / Recycling	Sì / yes / tak / ja
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	67
Angolo di proiezione / Beam angle	18° / 24° / 32°
Kąt rozsyłu światła / Lichtverteilungswinkel	
Temperatura di funzionamento / Operating temperature	-20°C~+45°C
Temperatura pracy / Arbeitstemperatur	
Materiali e finiture / Materials and finishing	Lega di alluminio + vetro temperato / Aluminum alloy + tempered glass / Stop aluminium + szkło hartowane / Cast Aluminum + Glas
Materiały i wykończenie / Materialien und Ausfertigung	
Colore / Product color / Kolor produktu / Farbe des Fabrikats	INOX
Energy label / Energy label	A*
Etykieta energetyczna / Energieverbrauchskennzeichnung	
Dimensioni / Product dimensions	Ø70x82mm
Wymiary produktu / Abmessungen des Fabrikats	
Peso sopportabile / Maximum pressure / maksymalny nacisk / maximalem druck	633kg

*Corporate research


Photometric data:

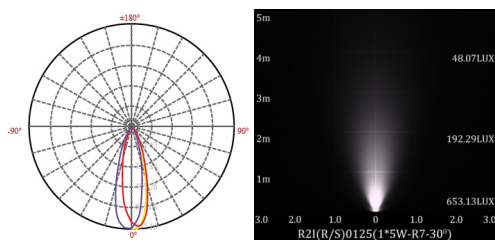


Light distribution:



Dimensions [mm]:

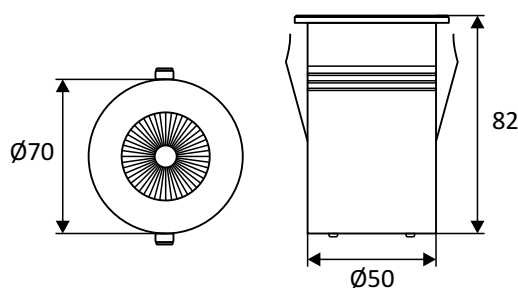

Mounting sleeve:



Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN61000-3-2:2006+A1/A2:2009
EN60598-2-5:1998	EN61000-3-3:2008
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015:2006+A1:2007+A2:2009
EN61547:2009	EMC 2004/108/EC