

OPTFLE06LT-80




Faretto LED / LED Flood light
Reflektory LED / LED - Scheinwerfer

RoHS CE

IT / ENG / PL / DE	
Consumo LED / LED power / Zużycie energii LED / LED-Leistung	80W
Consumo / Power consumption / Zużycie energii / Energieverbrauch	90W
Voltaggio / Input voltage & frequency	85-305VAC, 50/60Hz
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Fattore di potenza / Power factor / Współczynnik mocy / Leistungsfaktor	>90
Tipo LED / LED type / Typ LED / Typ von LED	Philips Luxeon / Rebel ES
Nr. LED / LED quantity / Ilość LED / Menge von LED	40
Temperatura della luce / Color temperature	4000-7000K
Temperatura barwowa / Farbtemperatur	
Angolo di proiezione / Beam angle	15x15 / 30x30 / 40x40 / 60x60 / 60x135 / 85x135
Kąt rozsyłu światła / Lichtverteilungswinkel	
Durata / Lifetime / Czas użytkowania / Lebensdauer	50.000h
Temperatura di funzionamento / Operating temperature	-25°C do +45°C
Temperatura pracy / Arbeitstemperatur	
Materiali e finiture / Materials and finishing	Lega di alluminio + vetro temperato / Aluminum alloy + tempered glass / Stop aluminium + szkło hartowane / Cast Aluminum + Glas
Materiały i wykończenie / Materialien und Ausfertigung	
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	IP65
Energy label / Energy label	A*
Etykieta energetyczna / Energieverbrauchskennzeichnung	
Colore / Product color / Kolor produktu / Farbe des Fabrikats	Nero / Black / Czarny / Schwarz
Riciclabile / Recycling / Recycling / Recykling	Si / yes / tak / ja
Dimensioni / Product dimensions	322x267x71mm
Wymiary produktu / Abmessungen des Fabrikats	
Lumen / Total Lumens	10400Lm
Całkowita ilość lumenów / Gesamte Menge von Lumen	
CRI / Color Rendering Index	> 85
Współczynnik oddawania barw / Farbwiedergabeindex	
Alimentatore / power supply / zasilacz / netzgerät	Meanwell

*Corporate research

Dimensions [mm]:

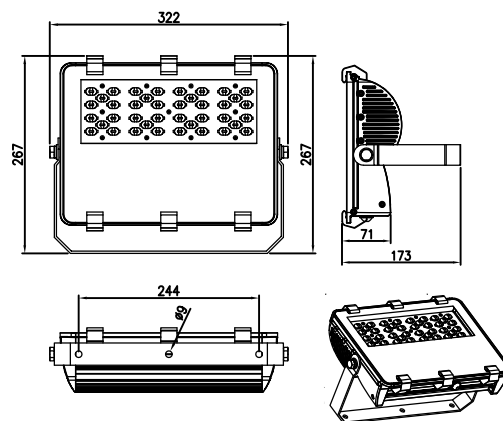

Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN6100-3-2/A2
EN60598-2-5:1998	EN6100-3-3
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015/A2