

OPTWW04-36SC

Wall Washer




CE ROHS

IT / ENG / PL / DE	
Consumo / Power consumption / Zużycie energii / Energieverbrauch	45W
Voltaggio / Input voltage & frequency	24V DC
Napięcie wejściowe i częstotliwość / Eingangsspannung und Frequenz	
Nr. Led / LED quantity / Ilość LED / Menge von LED	36
Tipo LED / LED type / Typ LED / Typ von LED	1W Edison LED
Colore della luce / Light color / Barwa światła / Lichtfarbe	Bianco / white / biały / weiß
Angolo di proiezione / Beam angle	8° / 12° / 30° / 45° / 50°
Kąt rozsyłu światła / Lichtverteilungswinkel	
Temperatura della luce / Color temperature	2700-7000K
Temperatura barwowa / Farbtemperatur	
Durata / Lifetime / Czas użytkowania / Lebensdauer	50.000 h
Riciclabile / Recycling / Recycling / Recykling	Sì / yes / tak / ja
IP Protezione alle infiltrazioni / IP rating / Stopień ochrony IP / Schutzart IP	IP65
ULOR	0%
Temperatura di funzionamento / Operating temperature	-40°C~40°C
Temperatura pracy / Arbeitstemperatur	
Materiali e finiture / Materials and finishing	Lega di alluminio + vetro temperato / Aluminum alloy + tempered glass / Stop aluminium + szkło hartowane / Cast Aluminum + Glas
Materiały i wykończenie / Materialien und Ausfertigung	
Lumen / Total Lumens	3650Lm (Nominal luminous flux 4600Lm)
Całkowita ilość lumenów / Gesamte Menge von Lumen	
Projecting distance	15-30m
Dimensioni / Product dimensions	1056x49x50mm
Wymiary produktu / Abmessungen des Fabrikats	
Peso netto / Net weight / Waga netto / Nettogewicht	~2,2kg

*Corporate research

Dimensions[mm]:

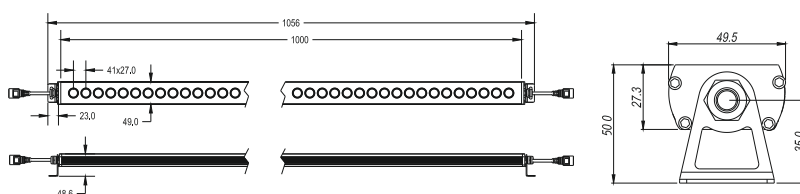

Certified in accordance with:

EN60598-1:2008+A11	LVD 2006/95/EC
EN60598-2-1:1989	EN6100-3-2/A2
EN60598-2-5:1998	EN6100-3-3
EN62471:2008	EN61347-2-13
EN62493:2010	EN55015/A2